



Scotts Bluff National Monument

Acoustic Monitoring Report

Natural Resource Report NPS/NRSS/NSNS/NRR—2016/1271



ON THE COVER

Eagle Rock at Scotts Bluff National Monument
Photograph by: NPS

Scotts Bluff National Monument

Acoustic Monitoring Report

Natural Resource Report NPS/NRSS/NSNS/NRR—2016/1271

Dr. Jacob R. Job

National Park Service
Natural Sounds and Night Skies Division
1201 Oakridge Drive, Suite 100
Fort Collins, Colorado 80525

August 2016

U.S. Department of the Interior
National Park Service
Natural Resource Stewardship and Science
Fort Collins, Colorado

The National Park Service, Natural Resource Stewardship and Science office in Fort Collins, Colorado, publishes a range of reports that address natural resource topics. These reports are of interest and applicability to a broad audience in the National Park Service and others in natural resource management, including scientists, conservation and environmental constituencies, and the public.

The Natural Resource Report Series is used to disseminate comprehensive information and analysis about natural resources and related topics concerning lands managed by the National Park Service. The series supports the advancement of science, informed decision-making, and the achievement of the National Park Service mission. The series also provides a forum for presenting more lengthy results that may not be accepted by publications with page limitations.

All manuscripts in the series receive the appropriate level of peer review to ensure that the information is scientifically credible, technically accurate, appropriately written for the intended audience, and designed and published in a professional manner.

Data in this report were collected analyzed using methods based on established, peer-reviewed protocols and were analyzed and interpreted within the guidelines of the protocols.

Views, statements, findings, conclusions, recommendations, and data in this report do not necessarily reflect views and policies of the National Park Service, U.S. Department of the Interior. Mention of trade names or commercial products does not constitute endorsement or recommendation for use by the U.S. Government.

This report is available in digital format from the Natural Resource Publications Management website (<http://www.nature.nps.gov/publications/nrpm/>). To receive this report in a format optimized for screen readers, please email irma@nps.gov.

Please cite this publication as:

Job, J.R. 2016 Scotts Bluff National Monument: Acoustic monitoring report. Natural Resource Report NPS/NRSS/NSNS/NRR—2016/1271. National Park Service, Fort Collins, Colorado.

Contents

	Page
Figures.....	iv
Tables.....	v
Appendices.....	vi
Executive Summary	vii
Introduction.....	10
National Park Service Natural Sounds and Night Skies Division.....	10
Soundscape Planning Authorities.....	10
Study Area	12
Methods.....	13
Automatic Monitoring.....	13
Calculation of Metrics.....	13
On-site Listening	14
Off-Site Listening/ Auditory Analysis	14
Results.....	15
Off-Site Data Analysis	16
Metrics.....	16
Audibility.....	19
Discussion.....	25
Literature Cited	26

Figures

	Page
Figure 1. Location of acoustic monitoring sites at Scotts Bluff National Monument.	12
Figure 2. Day and night dB levels for 33 one-third octave bands at SCBL001.....	17
Figure 3. Day and night dB levels for 33 one-third octave bands at SCBL002.....	17
Figure 4. Comparison of hourly vehicle and overall noise audibility at SCBL001. N=8 days off-site sound source analysis.	21
Figure 5. Comparison of hourly train and overall noise audibility at SCBL001. N=8 days off-site sound source analysis.	22
Figure 6. Comparison of hourly vehicle and overall noise audibility at SCBL002. N=8 days off-site sound source analysis.	23
Figure 7. Comparison of hourly train and overall noise audibility at SCBL002. N=8 days off-site sound source analysis.	24
Figure 8. SCBL001, ‘Visitor Center’ acoustical monitoring site.....	28
Figure 9. SCBL002, ‘Old Picnic Area’ acoustical monitoring site.....	29
Figure 10. SCBL002, ‘Old Picnic Area’ acoustical monitoring site.....	30
Figure 11. Modeled median sound level impacts in the area immediately surrounding SCBL and in the nearby region (inset).....	34

Tables

	Page
Table 1. Mean percent time audible for extrinsic, vehicles, trains, aircraft; existing and natural ambient sound levels.....	vii
Table 2. Percent time above metrics.	viii
Table 3. SCBL acoustical monitoring sites.....	12
Table 4. Summary of on-site audible sound sources for SCBL001 (n=4).	15
Table 5. Summary of on-site audible sound sources for SCBL002 (n=3).	15
Table 6. Exceedance levels for existing conditions in SCBL.	18
Table7. Percent time above metrics for existing conditions in SCBL.	19
Table 8. Mean hourly percent time audible for each noise source at SCBL001	20
Table 9. Mean hourly percent time audible for each noise source at SCBL002	20

Appendices

	Page
Appendix A: Site Photographs.....	28
Appendix B: Glossary of Acoustical Terms	31
Appendix C: Modeled Impact Levels	33

Executive Summary

In 2014, the Natural Sounds and Night Skies Division (NSNSD) received a request to collect baseline acoustical data at Scotts Bluff National Monument (SCBL). Between July and August 2014, two acoustical monitoring systems were deployed for approximately 30 days each. The goal of the study was to establish a baseline inventory of the soundscape at SCBL. This inventory will be used to establish indicators and standards of soundscape quality that will support the park and NSNSD in developing a comprehensive approach to protecting the acoustic environment through soundscape management planning. Results of this study will help the park identify major sources of noise within the park, including quantifying vehicular and railroad noise, as well as provide a baseline understanding of the acoustical environment as a whole for use in future comparative studies.

For the purposes of this document, we will refer to “noise” as any human-caused sound that masks or degrades natural sounds (Lynch et al. 2011). The most common sources of noise at SCBL include vehicles, trains, and aircraft, although building sounds were prevalent at one acoustical monitoring site. Table 1 displays percent time audible values for each of these common noise sources during the monitoring period, as well as ambient sound levels. Ambient sound pressure levels, or changes in atmospheric pressure due to passage of sound, were measured continuously every second over the 30 day monitoring period by a calibrated, Type 1, Larson Davis 831 sound level meter (see Figures 8 - 10). Percent time audible metrics were calculated by trained technicians after monitoring was complete. See Methods section for protocol details and equipment specifications. Median existing (L_{50}) and natural (L_{nat}) ambient metrics are also reported for daytime (7 am – 7 pm) and nighttime (7 pm – 7am). See Methods section for detailed information on how these metrics are calculated. Day time ambient sound pressure levels at both monitoring sites were largely dominated by noise in the frequencies typically attributed to transportation noise sources (20 – 1250Hz), indicating that humans significantly affect the acoustical environment. Additionally, sound pressure levels increased at night at SCBL002, likely due to the prevalence of vocalizing insects.

Table 1. Mean percent time audible for extrinsic, vehicles, trains, aircraft; existing and natural ambient sound levels.

Site ID	Site Description	Mean percent time audible (in 24 hour time period) ^a				Median Existing Ambient (L_{50}) in dBA ^b		Median Natural Ambient (L_{nat}) in dBA	
		All Extrinsic	Vehicle	Train	Aircraft	Day ^c	Night	Day	Night
SCBL001	Visitor Center	90.7	51.4	21.4	8.7	37.1	32.6	31.9	26.8
SCBL002	Old Picnic Area	63.4	19.1	34.2	15.4	29.7	35.1	26.3	30.6

^a Over a 24-hour period, based on eight days of analysis.

^b For comparison, nighttime sound level in a typical residential area is about 40 dBA.

^c Day hours are 0700-1900; night hours are 1900-0700.

In determining the current conditions of an acoustical environment, it is informative to examine how often sound pressure levels exceed certain values. Table 2 reports the percent of time that measured levels were above four key values. The first value, 35 dBA, is designed to address the health effects of sleep interruption. Recent studies suggest that sound events as low as 35 dB can have adverse effects on blood pressure while sleeping (Haralabidis et al. 2008). This is also the desired background sound level in classrooms (ANSI S12.60-2002). The second value addresses the World Health Organization’s recommendations that noise levels inside bedrooms remain below 45 dBA (Berglund et al. 1999). The third value, 52 dBA, is based on the EPA’s speech interference level for speaking in a raised voice to an audience at 10 meters (EPA 1974). This value addresses the effects of sound on interpretive presentations in parks. The final value, 60 dBA, provides a basis for estimating impacts on normal voice communications at 1 meter. Visitors viewing scenic areas in the park would likely be conducting such conversations. The top value in each split-cell focuses on frequencies affected by transportation noise (20-1250 Hz) whereas the bottom values use the full frequency range (12.5-20,000 Hz) collected. Most motorized human-caused noise is confined to the truncated, lower-frequency range, while many natural sounds, including insects and birds, are higher in pitch. Therefore, the truncated range (20-1250 Hz) is more appropriate for identifying impacts from anthropogenic noise in parks (Acoustical Society of America 2014).

Table 2. Percent time above metrics.

Site	Frequency (Hz)	% Time above sound level: 0700 to 1900 (Day)				% Time above sound level: 1900 to 0700 (Night)			
		35 dBA	45 dBA	52 dBA	60 dBA	35 dBA	45 dBA	52 dBA	60 dBA
SCBL001	20-1250	53.6	9.8	2.7	0.2	22.7	2.5	0.3	0.0
	12.5-20,000	68.5	13.6	4.0	0.6	28.7	3.5	0.4	0.0
SCBL002	20-1250	10.6	0.9	0.1	0.0	15.7	0.6	0.0	0.0
	12.5-20,000	21.3	2.7	0.4	0.1	59.2	7.1	0.3	0.0

Acknowledgments

The author of this report wish to express his sincere gratitude to all who helped make this a successful study, including Colorado State University Listening Lab student Sara Brandenburg, Taylor Greene, Colton Raab, and Gabby Staats for their work in the off-site acoustical data analysis and Cecilia White for her coordination of the data analysis, as well as the deployment of the monitoring stations.

Introduction

A 1998 survey of the American public revealed that 72 percent of respondents thought that providing opportunities to experience natural quiet and the sounds of nature was a very important reason for having national parks, while another 23 percent thought that it was somewhat important (Haas & Wakefield 1998). In another survey specific to park visitors, 91 percent of respondents considered enjoyment of natural quiet and the sounds of nature as compelling reasons for visiting national parks (McDonald et al. 1995). Acoustical monitoring provides a scientific basis for assessing the current status of acoustic resources, identifying trends in resource conditions, quantifying impacts from other actions, assessing consistency with park management objectives and standards, and informing management decisions regarding desired future conditions.

National Park Service Natural Sounds and Night Skies Division

The Natural Sounds and Night Skies Division (NSNSD) helps parks manage sounds in a way that balances access to the park with the expectations of park visitors and the protection of park resources. The NSNSD addresses acoustical issues raised by Congress, NPS Management Policies, and NPS Director's Orders. The NSNSD works to protect, maintain, or restore acoustical environments throughout the National Park System. Its goal is to provide coordination, guidance, and a consistent approach to soundscape protection with respect to park resources and visitor use. The program also provides technical assistance to parks in the form of acoustical monitoring, data processing, park planning support, and comparative analyses of acoustical environments.

Soundscape Planning Authorities

The National Park Service Organic Act of 1916 states that the purpose of national parks is "... to conserve the scenery and the natural and historic objects and the wild life therein and to provide for the enjoyment of the same in such manner and by such means as will leave them unimpaired for the enjoyment of future generations." In addition to the NPS Organic Act, the Redwoods Act of 1978 affirmed that, "the protection, management, and administration of these areas shall be conducted in light of the high value and integrity of the National Park System and shall not be exercised in derogation of the values and purposes for which these various areas have been established, except as may have been or shall be directly and specifically provided by Congress."

Direction for management of natural soundscapes¹ is represented in 2006 Management Policy 4.9:

The Service will restore to the natural condition wherever possible those park soundscapes that have become degraded by unnatural sounds (noise), and will protect natural soundscapes from unacceptable impacts. Using appropriate management planning, superintendents will identify what levels and types of unnatural sound constitute acceptable impacts on park natural soundscapes. The frequencies, magnitudes, and durations of

¹ The 2006 Management Policy 4.9 and related documents refer to "soundscapes" instead of "acoustic resources." When quoting from this authority, it is advisable to note that the term often refers to resources rather than visitor perceptions.

acceptable levels of unnatural sound will vary throughout a park, being generally greater in developed areas. In and adjacent to parks, the Service will monitor human activities that generate noise that adversely affects park soundscapes [acoustic resources], including noise caused by mechanical or electronic devices. The Service will take action to prevent or minimize all noise that through frequency, magnitude, or duration adversely affects the natural soundscape [acoustic resource] or other park resources or values, or that exceeds levels that have been identified through monitoring as being acceptable to or appropriate for visitor uses at the sites being monitored (NPS 2006a).

It should be noted that “the natural ambient sound level—that is, the environment of sound that exists in the absence of human-caused noise—is the baseline condition, and the standard against which current conditions in a soundscape [acoustic resource] will be measured and evaluated” (NPS 2006b). However, the desired acoustical condition may also depend upon the resources and the values of the park. For instance, “culturally appropriate sounds are important elements of the national park experience in many parks” (NPS 2006b). In this case, “the Service will preserve soundscape resources and values of the parks to the greatest extent possible to protect opportunities for appropriate transmission of cultural and historic sounds that are fundamental components of the purposes and values for which the parks were established” (NPS 2006b).

Study Area

Scotts Bluff National Monument (SCBL) was established in 1919 and is located near the towns of Scottsbluff, Gering, and Terrytown, Nebraska. During the summer of 2014, two acoustic monitoring stations were deployed in the park. One site was located near the visitor center and maintenance building, in a relatively developed portion of the park. The other site was located in the backcountry, near an old picnic site. Because of the difference in location (frontcountry vs. backcountry), the two sites were expected to exhibit different acoustic qualities. Table 3 shows site information for the two monitoring stations, and Figure 1 shows the locations of the acoustic monitoring stations.

Table 3. SCBL acoustical monitoring sites

Site	Site Name	Dates Deployed	Vegetation	Elevation (m)	Latitude	Longitude
SCBL001	Visitor Center	7/14/2014 – 8/12/2014	Temperate Grasslands	1153.7	41.829237	-103.708315
SCBL002	Old Picnic Area	7/14/2014 – 8/12/2014	Temperate Grasslands	1199.7	41.822933	-103.718798

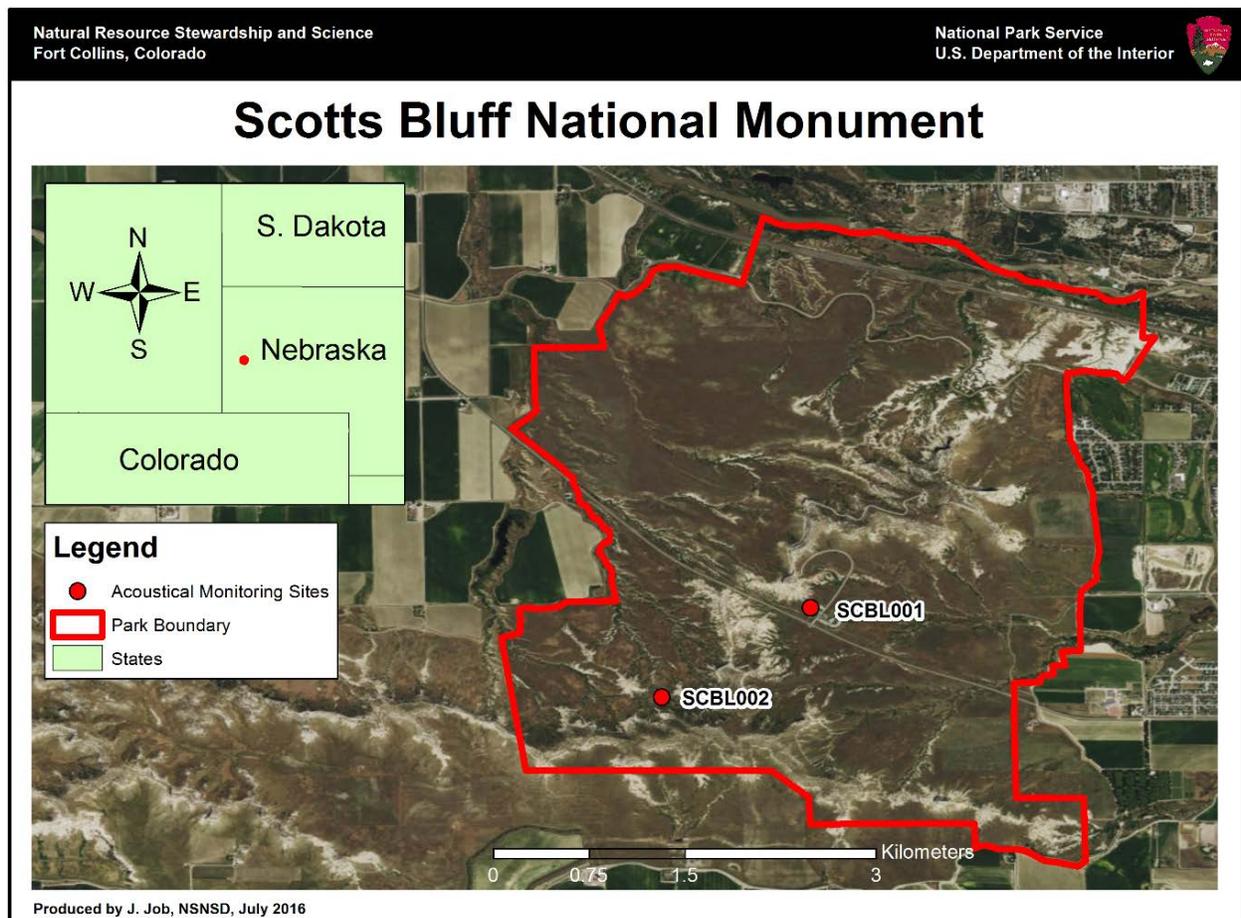


Figure 1. Location of acoustic monitoring sites at Scotts Bluff National Monument.

Methods

Automatic Monitoring

Larson Davis 831 sound level meters (SLM) were employed over thirty day monitoring periods at the SCBL sites. The Larson Davis SLM is a hardware-based, real-time analyzer which constantly records one second sound pressure level (SPL) and 1/3 octave band data. These Larson Davis-based sites met American National Standards Institute (ANSI) Type 1 standards. These sound level meters provided the information needed to calculate metrics described below in Calculation of Metrics.

The sampling stations consisted of:

- Microphone with environmental shroud
- Preamplifier
- 3.2 V LiFe rechargeable battery packs (9 packs)
- Anemometer (wind speed and direction)
- Temperature and humidity probe
- MP3 recorder

The sampling stations collected:

- SPL data in the form of A-weighted decibel readings (dBA) every second
- Continuous digital audio recordings
- One-third octave band data every second ranging from 12.5 Hz – 20,000 Hz
- Continuous meteorological data including wind speed, direction, temperature, and relative humidity

Calculation of Metrics

The current status of the acoustical environment can be characterized by spectral measurements, durations, and overall sound levels (intensities). The NSNSD uses descriptive figures and metrics to interpret these characteristics. Two fundamental descriptors are existing ambient (L_{50}) and natural ambient (L_{nat}) sound levels. These are both examples of exceedance levels, where each L_x value refers to the sound pressure level that is exceeded $x\%$ of the time. The L_{50} represents the median sound pressure level, and is comprised of spectra (in dB) drawn from a full dataset (removing data with wind speed $> 5\text{m/s}$ to eliminate error from microphone distortion.). The natural ambient (L_{nat}) is an estimate of what the ambient level for a site would be if all extrinsic (anthropogenic sources) were removed. Unlike the existing ambient, the natural ambient is comprised of spectra drawn from a subset of the original data.

For a given hour (or other specified time period), L_{nat} is calculated to be the decibel level exceeded x percent of the time, where x is defined by equation (1):

$$x = \frac{100 - P_H}{2} + P_H \quad (1)$$

and P_H is the percentage of samples containing extrinsic or anthropogenic sounds for the hour. For example, if human caused sounds are present 30% of the hour, $x = 65$, and the L_{nat} is equal to the L_{65} , or the level exceeded 65% of the time. To summarize and display these data, the median of the hourly L_{nat} values for the daytime hours (0700-1900) and the median of the hourly L_{nat} values for the nighttime (1900-0700) are displayed in Figures 2 through 8 in the results section. Additionally, these figures separate the data into 33 one-third octave bands.

On-site Listening

While the sound level meter provides information about how loud or quiet the acoustical environment is at a given time, we need .mp3 recordings or on-site listening sessions to know *what* or *who* is making the sound. On-site listening is the practice of placing an observer near the acoustical monitoring station with a handheld personal digital assistant (PDA; or in this case, an Apple iPod Touch device). The observer listens for a designated period of time (in this case, one hour), and identifies all sound sources and their durations. On-site listening takes full advantage of human binaural hearing capabilities, and closely matches the experience of most park visitors. Logistic constraints prevent comprehensive sampling by this technique, but selective samples of onsite listening provide a basis for relating the results of off-site listening to the probable auditory perception of events by park visitors and wildlife. On-site listening sessions are also an excellent screening tool for parks initiating acoustical environment studies. They produce an extensive inventory of sound sources, require little equipment or training, and can help educate park staff and volunteers.

Thus, four sessions of on-site listening were conducted at SCBL001 and three for SCBL002, in order to discern the type, timing, and duration during sound-level data collection. As recommended by NSNSD protocol (NPS 2005), these sessions lasted for one hour each. Staff recorded the beginning and ending times of all audible sound sources using custom-designed software. These on-site listening sessions provided the basis for the calculation of metrics including the period of time between noise events (average noise free interval [NFI]), percent time each sound source was audible, and maximum, minimum, and mean length (in seconds) of sound source events. The results of these on-site listening sessions are summarized in Tables 4 and 5.

Off-Site Listening/ Auditory Analysis

Auditory analysis was used to calculate the audibility of sound sources at SCBL. Trained technicians at Colorado State University analyzed a subset of .mp3 samples (10 seconds every two minutes for eight days of audio) in order to identify durations of audible sound sources. Staff used the total percent time extrinsic sounds were audible to calculate the natural ambient sound level for each hour (see Equation 1 above for more information). Bose Quiet Comfort Noise Canceling headphones were used for off-site audio playback to minimize limitations imposed by the office acoustic environment. For the complete results of this thorough audibility analysis, see Tables 8 and 9 in the Off-Site Data Analysis section below.

Results

On-site Listening

Tables 4 and 5 display the results of the on-site listening sessions at SCBL. Each audible sound source is listed in the first column. Percent time audible, or PA, is shown in the second column. The third column, Max Event, reports the maximum event length among the sessions for each sound source. Likewise, Mean Event and Min Event columns report the mean and minimum length of events, respectively. SD reports the standard deviation among event lengths, and the Events column reports the audible discrete occurrences of each sound source. The last row in the table, noise free interval (NFI), is a metric which describes the length of time between extrinsic or human-caused events (when only natural sounds were audible). These on-site listening tables are essentially a sound inventory of each site. They reveal the sounds one is likely to hear at or near this location. In the following tables, anthropogenic noises are white and the natural sounds at the site are highlighted in gray.

Table 4. Summary of on-site audible sound sources for SCBL001 (n=4).

Sound Source	PA (%)	Max Event (mm:ss)	Mean Event (mm:ss)	Min Event (mm:ss)	SD (mm:ss)	Events
Jet	7.3	02:06	01:07	00:07	00:39	9
Propeller	2.2	01:22	01:17	01:13	00:06	2
Vehicle	24.9	01:52	00:34	00:01	00:25	60
Vehicle door	0.1	00:02	00:02	00:02	00:00	2
Motor	3.9	02:06	00:40	00:11	00:43	7
Grounds care	50.4	34:38	07:41	00:03	10:17	16
People	49.7	33:51	02:56	00:06	06:11	33
Domestic animal	0.5	00:33	00:19	00:05	00:19	2
Non-natural total	50.7	34:38	01:38	00:02	02:10	276
Wind	23.6	03:05	01:00	00:08	00:57	33
Bird	49.9	15:36	02:04	00:02	03:49	48
Insect	21.3	01:44	00:25	00:01	00:20	64
Noise-free interval		00:10	01:07	00:07	00:39	6

Table 5. Summary of on-site audible sound sources for SCBL002 (n=3).

Sound Source	PA (%)	Max Event (mm:ss)	Mean Event (mm:ss)	Min Event (mm:ss)	SD (mm:ss)	Events
Jet	25.1	03:07	01:40	00:14	00:47	27
Propeller	3.3	02:15	01:59	01:44	00:15	3
Vehicle	20.4	04:03	00:37	00:07	00:36	58
Vehicle Alarm	2.1	01:06	00:25	00:06	00:19	9

Table 5 (continued). Summary of on-site audible sound sources for SCBL002 (n=3).

Sound Source	PA (%)	Max Event (mm:ss)	Mean Event (mm:ss)	Min Event (mm:ss)	SD (mm:ss)	Events
Motor	15.1	03:00	00:43	00:04	00:38	38
Grounds Care	0.2	00:27	00:27	00:27	n/a	1
Human, Unknown	0.8	01:22	01:22	01:22	n/a	1
Non-natural total	56.2	04:30	01:02	00:04	00:37	137
Wind	38.4	13:25	01:08	00:06	01:52	61
Rain, Fog Drip	23.7	17:31	14:14	10:54	03:18	3
Bird	98.9	60:00	44:58	20:41	18:54	4
Insect	48.5	43:20	02:13	00:02	07:19	40
Noise-free interval	--	10:40	00:55	00:01	01:42	87

Off-Site Data Analysis

Metrics

In order to determine the effect that extrinsic noise audibility has on the acoustical environment, it is useful to examine the median hourly exceedance metrics. The dB levels for 33 one-third octave band frequencies over the day and night periods are shown in Figures 2 and 3. High frequency sounds (such as a cricket chirping) and low frequency sounds (such as flowing water) often occur simultaneously, so the frequency spectrum is split into 33 smaller ranges, each encompassing one-third of an octave. For each one-third octave band, dB level was recorded once per second for the duration of the monitoring period. Recording the sound intensity of each one-third octave band (combined with digital audio recordings) allows acoustic technicians to determine what types of sounds are contributing to the overall sound pressure level of a site. The grayed area of the graph represents sound levels outside of the typical range of human hearing. The exceedance levels (L_x) are also shown for each one-third octave band. They represent the dB level exceeded x percent of the time. For example, L_{90} is the dB level that has been exceeded 90% of the time, and only the quietest 10% of the samples can be found below this point. On the other hand, the L_{10} is the dB level that has been exceeded 10% of the time, and 90% of the measurements are quieter than the L_{10} . The bold portion of the column represents the difference between L_{50} (existing ambient) and L_{nat} (natural ambient). The height of this bold portion is a measure of the contribution of anthropogenic noise to the existing ambient sound levels at this site. The size of this portion of the column is directly related to the percent time that human caused sounds are audible. When bold portions of the column do not appear the natural and existing ambient levels were either very close to each other, or were equal.

L_{nat} and L_{50} are bordered above by L_{10} and below by L_{90} , which essentially mark the median (L_{50}), maximum (L_{90}), and minimum (L_{10}) sounds pressure levels over the 30 day monitoring period. The typical frequency levels for transportation, conversation and songbirds are presented on the figure as examples for interpretation of the data. These ranges are estimates and are not vehicle-, species-, or habitat-specific.

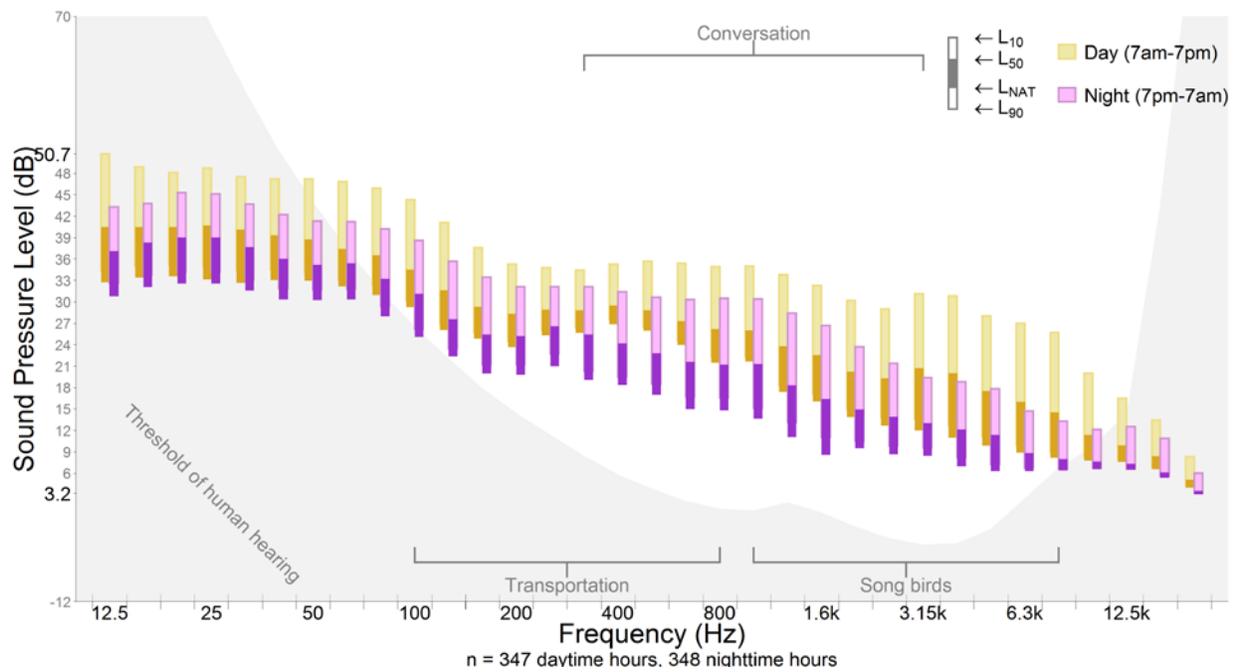


Figure 2. Day and night dB levels for 33 one-third octave bands at SCBL001.

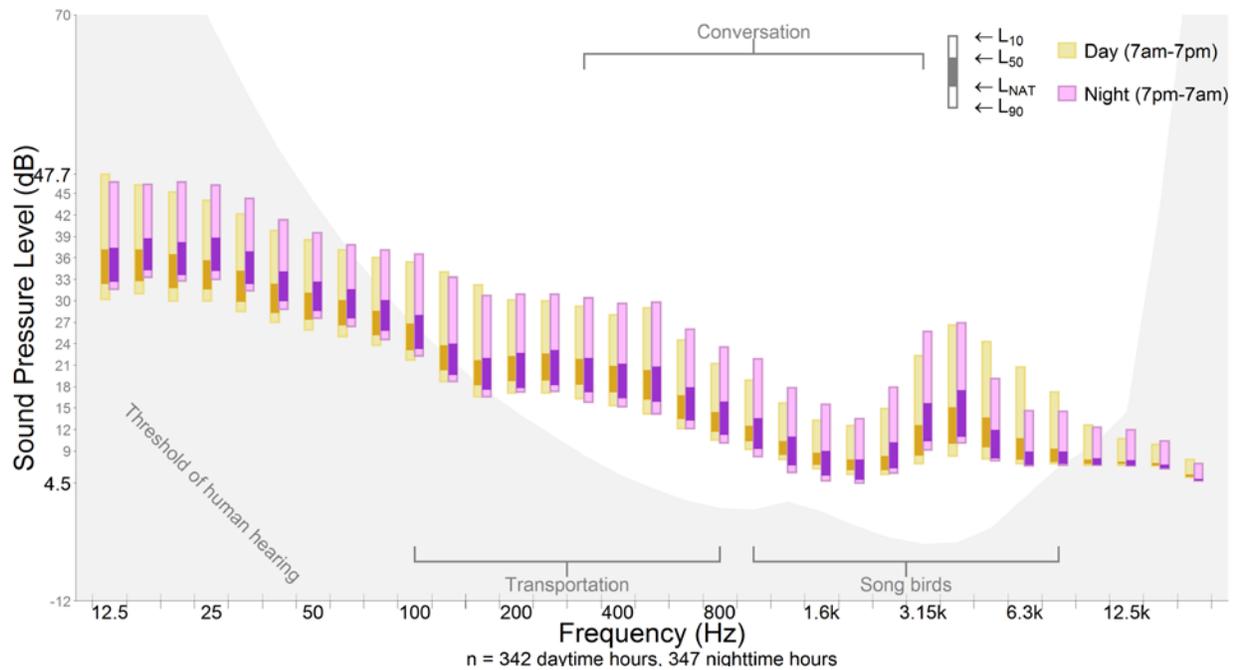


Figure 3. Day and night dB levels for 33 one-third octave bands at SCBL002.

Table 6 reports the L_{90} , L_{nat} , L_{50} , and L_{10} values for the sites measured at SCBL. The top value in each cell focuses on frequencies affected by transportation noise, whereas the lower values use the conventional full frequency range. Most human-caused noise is confined to the truncated, lower-

frequency range, while many loud natural sounds, including insects and birds, are higher in pitch. Therefore, the truncated range is more appropriate for identifying noise levels in parks (Acoustical Society of America 2014).

Table 6. Exceedance levels for existing conditions in SCBL.

Site	Frequency (Hz)	Exceedance levels (dBA): 0700 to 1900 hours (Day)				Exceedance levels (dBA): 1900 to 0700 hours (Night)			
		L ₉₀	L _{nat}	L ₅₀	L ₁₀	L ₉₀	L _{nat}	L ₅₀	L ₁₀
SCBL001	20-1,250	31.5	30.9	34.8	43.0	26.0	24.4	30.6	38.8
	12.5-20,000	32.6	31.9	37.1	45.3	27.6	26.8	32.6	40.0
SCBL002	20-1,250	21.5	22.6	26.0	33.1	21.1	22.3	26.6	34.6
	12.5-20,000	24.8	26.3	29.7	37.2	29.7	30.6	35.1	41.4

In determining the current conditions of an acoustical environment, it is important to examine how often sound pressure levels exceed certain values. Table 7 reports the percent of time that measured levels were above four key values during the monitoring period (daytime and nighttime). The top value in each split-cell focuses on frequencies affected by transportation noise whereas the lower values use the conventional full frequency range. The first, 35 dBA, is designed to address the health effects of sleep interruption. Recent studies suggest that sound events as low as 35 dB can have adverse effects on blood pressure while sleeping (Haralabidis et al. 2008). This is also the desired background sound level in classrooms (ANSI S12.60-2002). The second value addresses the World Health Organization’s recommendations that noise levels inside bedrooms remain below 45 dBA (Berglund et al. 1999). The third value, 52 dBA, is based on the EPA’s speech interference threshold for speaking in a raised voice to an audience at 10 meters (EPA 1974). This threshold addresses the effects of sound on interpretive presentations in parks. The final value, 60 dBA, provides a basis for estimating impacts on normal voice communications at 1 meter. Visitors viewing scenic areas in the park would likely be conducting such conversations. The top value in each split-cell focuses on frequencies affected by transportation noise (20 – 1250 Hz) whereas the bottom values use the full frequency range (12.5 – 20,000 Hz) collected. Most motorized human-caused noise is confined to the truncated, lower-frequency range, while many natural sounds, including insects and birds, are higher in pitch. Therefore, the truncated range (20 – 1250 Hz) is more appropriate for identifying impacts from anthropogenic noise in parks (Acoustical Society of America 2014).

Table7. Percent time above metrics for existing conditions in SCBL.

Site	Frequency (Hz)	% Time above sound level: 0700 to 1900 (Day)				% Time above sound level: 1900 to 0700 (Night)			
		35 dBA	45 dBA	52 dBA	60 dBA	35 dBA	45 dBA	52 dBA	60 dBA
SCBL001	20-1250	53.6	9.8	2.7	0.2	22.7	2.5	0.3	0.0
	12.5-20,000	68.5	13.6	4.0	0.6	28.7	3.5	0.4	0.0
SCBL002	20-1250	10.6	0.9	0.1	0.0	15.7	0.6	0.0	0.0
	12.5-20,000	21.3	2.7	0.4	0.1	59.2	7.1	0.3	0.0

Audibility

Audibility results are presented below. Tables 8 and 9 show the mean percentage of time that all noise sources were audible, based on eight days of off-site auditory analysis. Figures 4 – 7 show hourly audibility results and compares overall noise audibility to that of vehicles and trains.

Table 8. Mean hourly percent time audible for each noise source at SCBL001. N=8 days off-site sound source analysis.

Sound Source	00h	01h	02h	03h	04h	05h	06h	07h	08h	09h	10h	11h	12h	13h	14h	15h	16h	17h	18h	19h	20h	21h	22h	23h
Aircraft	5.0	6.2	7.5	6.7	2.1	0.8	15.0	22.1	8.3	20.4	14.2	11.3	13.3	7.5	5.4	10.0	9.2	8.3	8.7	5.8	5.4	7.1	5.4	2.1
Vehicle	36.2	29.6	23.7	17.9	28.7	50.8	65.4	66.3	53.3	59.2	62.1	61.7	59.2	59.2	57.5	57.9	66.7	62.5	51.7	64.2	64.2	51.7	47.5	35.4
Train	42.5	42.5	51.7	54.6	45.8	43.8	46.3	26.2	25.8	7.1	4.6	2.1	0.4	4.2	0.4	0.4	0.4	7.1	10.4	6.7	22.5	23.3	22.5	23.7
Motor	0.4	0.4	0.4	0.8	0.4	0.4	0.0	0.0	0.0	0.0	2.9	0.8	0.0	0.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Grounds Care	0.0	13.8	22.5	0.4	8.7	4.2	1.2	12.9	25.4	27.1	26.2	17.5	14.6	25.4	27.5	15.8	7.9	9.2	7.9	3.8	10.8	0.8	0.4	0.0
People	0.8	0.0	0.0	0.0	0.4	2.5	10.8	19.2	27.1	29.6	28.3	35.0	26.7	27.9	27.1	19.6	15.4	22.1	23.7	15.8	20.0	15.4	14.6	12.9
Domestic animal	0.8	2.9	2.9	2.9	1.7	1.7	0.4	0.8	0.8	0.8	0.0	1.7	0.4	1.2	0.8	2.5	1.2	0.8	2.5	0.0	0.8	1.2	5.4	7.1
Building sounds	35.4	35.8	35.8	24.6	17.1	12.9	20.0	17.5	13.3	14.6	15.4	18.3	28.3	25.4	19.6	25.0	21.7	33.7	32.9	29.2	29.6	40.0	29.6	37.5
Non-natural other	0.0	0.0	0.0	0.0	0.0	0.0	0.4	0.8	0.4	0.0	0.4	0.8	2.5	0.4	0.0	0.4	0.4	0.8	0.0	0.4	0.8	0.0	0.8	0.4
Non-natural unknown	0.4	0.4	1.2	0.4	0.0	0.8	0.4	0.4	0.8	0.4	0.0	0.0	0.8	0.0	0.0	0.0	0.4	1.7	0.8	0.8	0.4	0.0	0.8	0.0
Non-Natural Total	92.1	95	89.2	78.7	75.4	81.2	93.3	94.2	89.2	90.8	94.2	91.7	93.3	94.2	91.7	85.8	88.7	94.2	90.8	90.8	98.7	99.2	92.9	90.8

20

Table 9. Mean hourly percent time audible for each noise source at SCBL002. N=8 days off-site sound source analysis.

Sound Source	0h	01h	02h	03h	04h	05h	06h	07h	08h	09h	10h	11h	12h	13h	14h	15h	16h	17h	18h	19h	20h	21h	22h	23h
Aircraft	9.6	6.7	8.3	5.4	5.8	3.3	9.6	17.9	14.6	23.7	28.7	23.7	27.5	22.1	17.5	20.4	19.2	18.8	15.4	15.4	22.1	12.5	14.2	6.2
Vehicle	20.8	12.5	17.1	11.3	13.3	31.7	39.2	41.7	32.9	30.8	19.6	10.8	21.7	15	10.8	12.9	11.7	9.6	10	17.1	17.5	19.2	13.8	17.5
Train	33.7	56.3	55.8	62.9	57.9	55.8	50.8	44.6	57.5	35	37.5	32.1	17.5	13.8	12.1	9.6	17.1	12.5	18.3	16.7	15.4	27.9	37.9	41.7
Motor	0.0	0.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
People	0.0	0.0	0.4	0.0	0.0	0.0	1.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Domestic animal	0.0	3.3	4.6	0.4	0.0	1.2	2.1	2.5	0.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.4	0.8	0.0
Non-natural other	0.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.4	0.0
Non-natural unknown	0.8	0.0	0.0	0.4	0.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Non-natural total	60.4	72.5	76.7	75	70.4	81.7	89.2	89.6	86.7	80.8	76.7	60.4	62.5	49.6	38.3	40.8	45.8	40	41.7	48.3	53.8	58.8	58.8	62.9

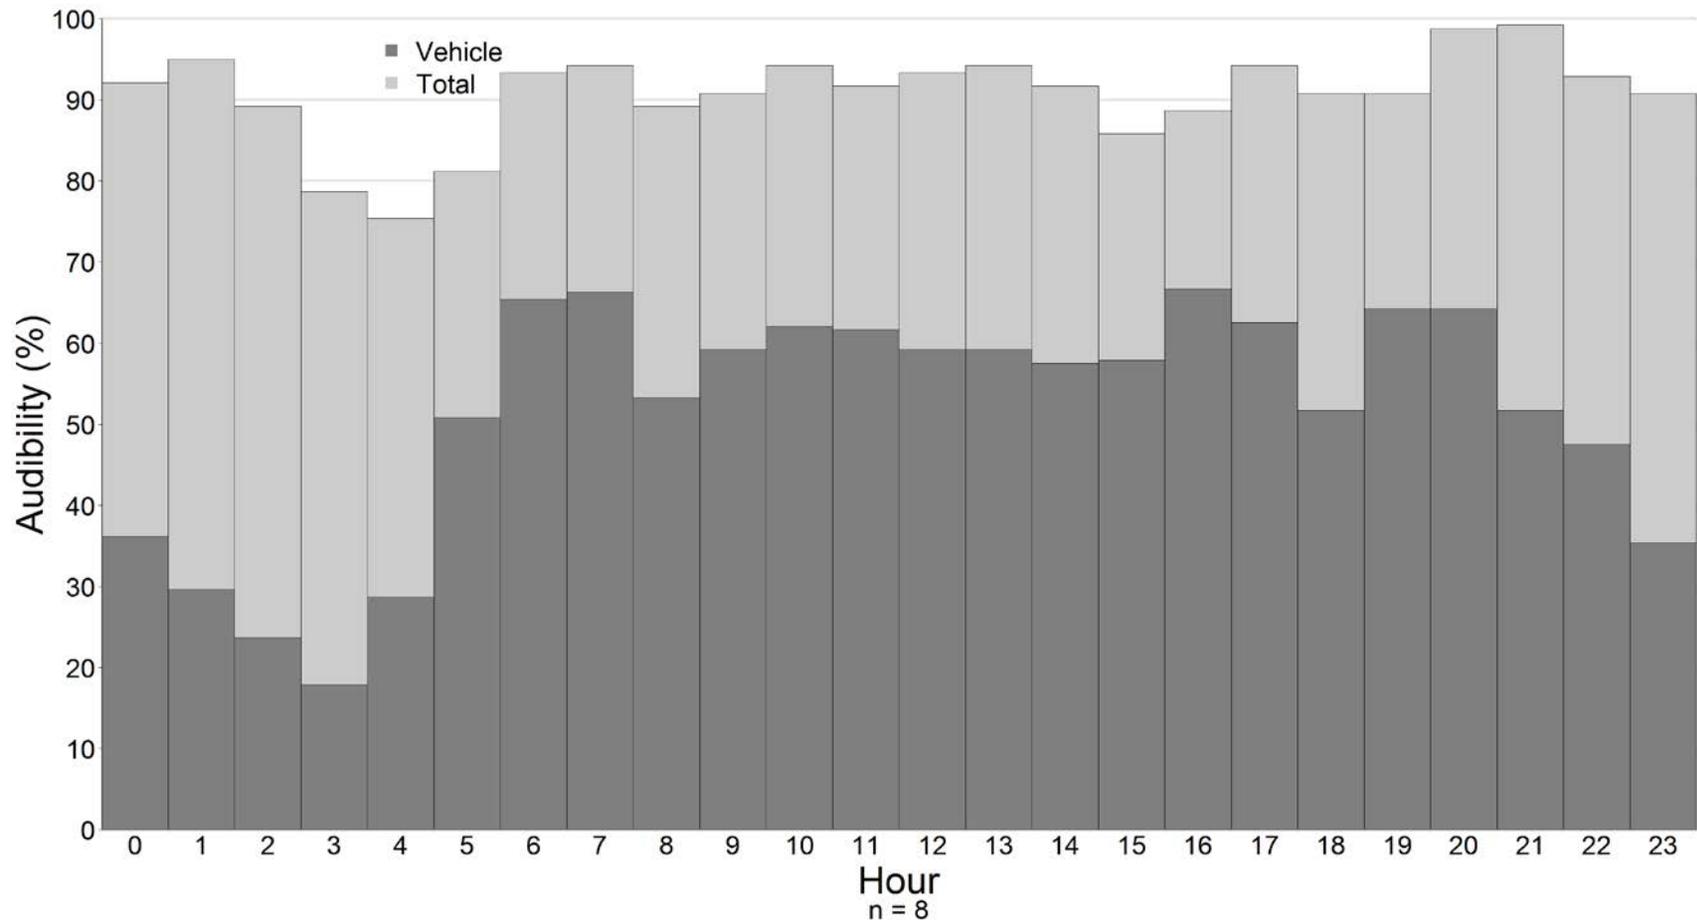


Figure 4. Comparison of hourly vehicle and overall noise audibility at SCBL001. N=8 days off-site sound source analysis.

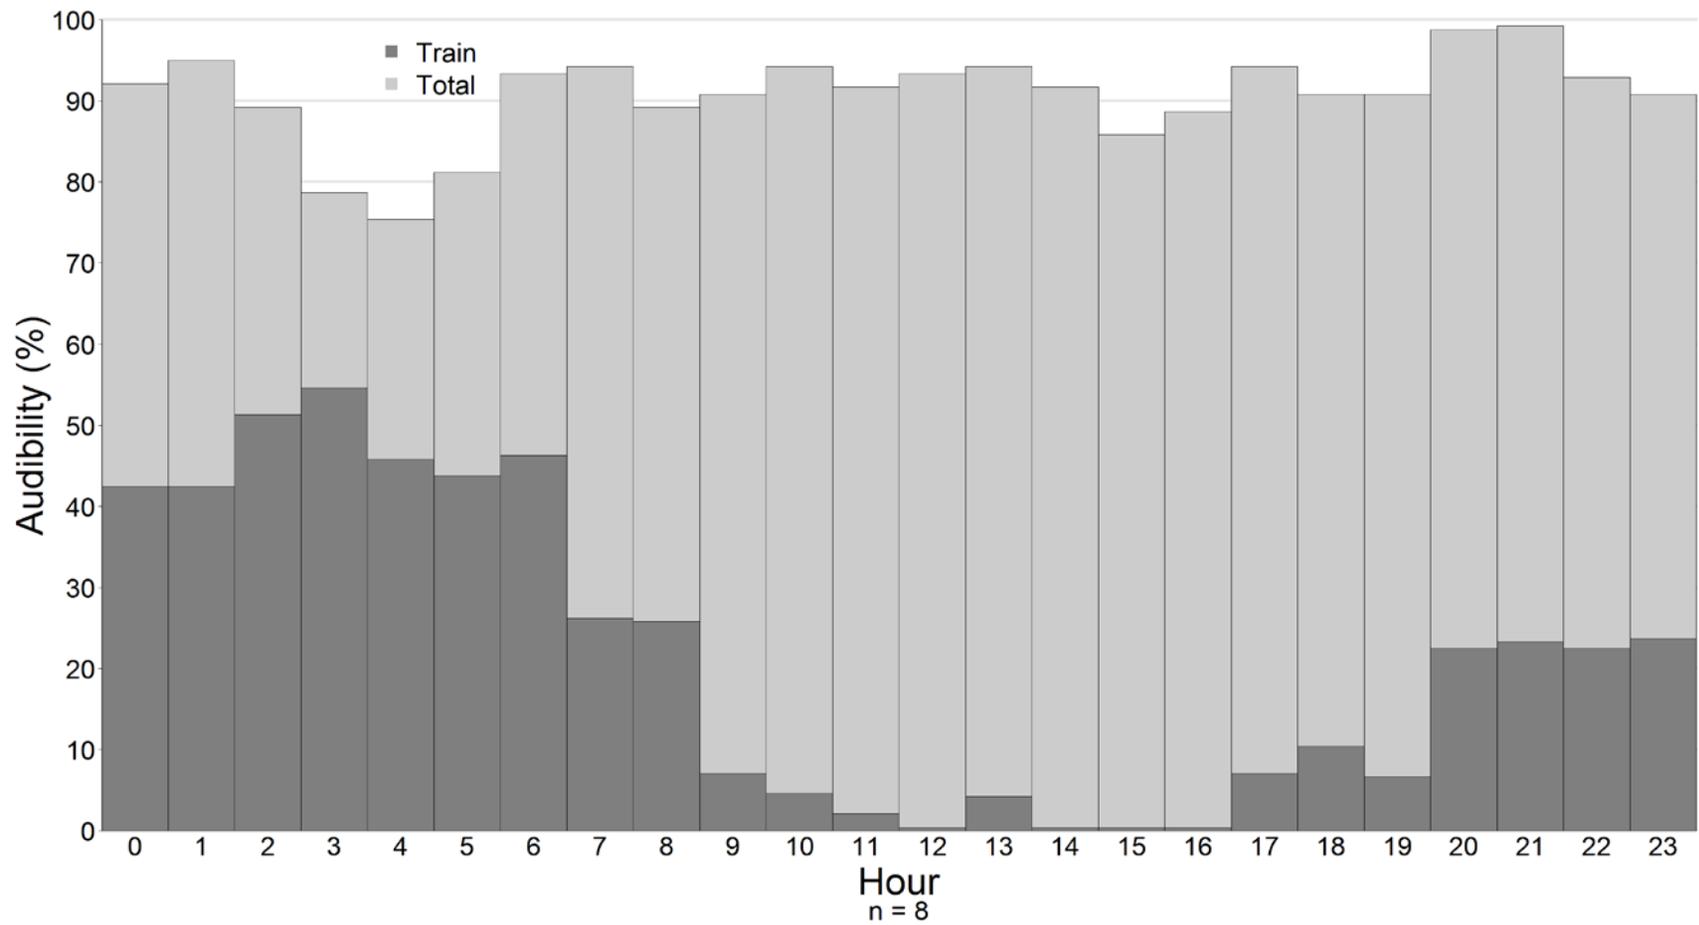


Figure 5. Comparison of hourly train and overall noise audibility at SCBL001. N=8 days off-site sound source analysis.

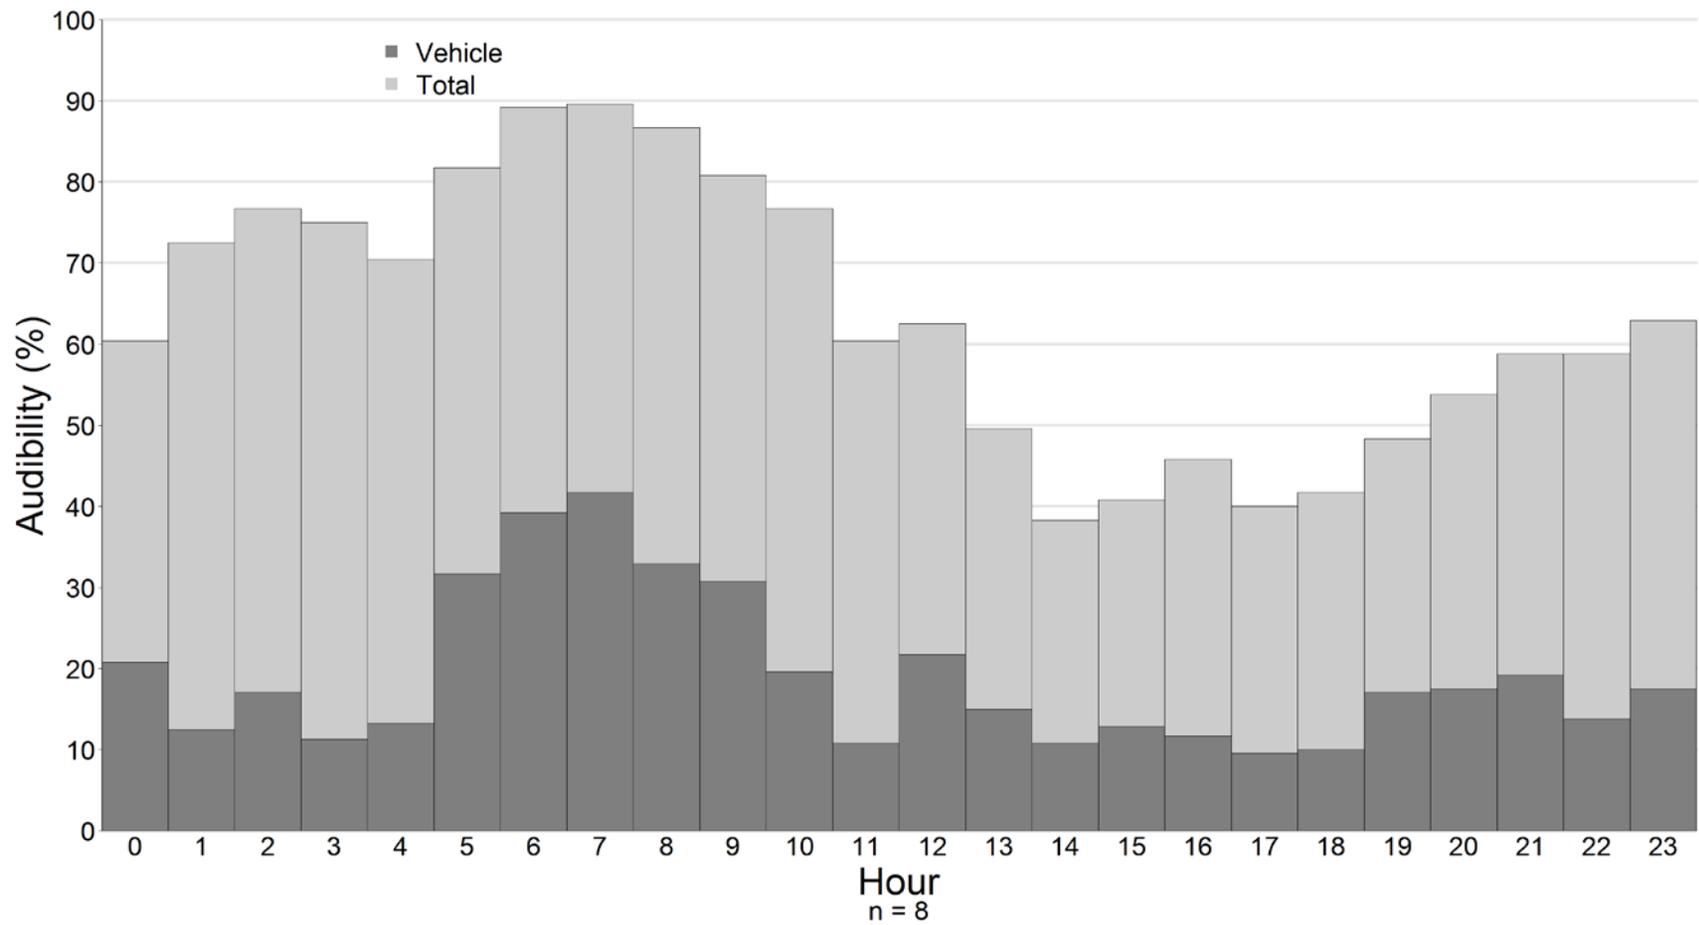


Figure 6. Comparison of hourly vehicle and overall noise audibility at SCBL002. N=8 days off-site sound source analysis.

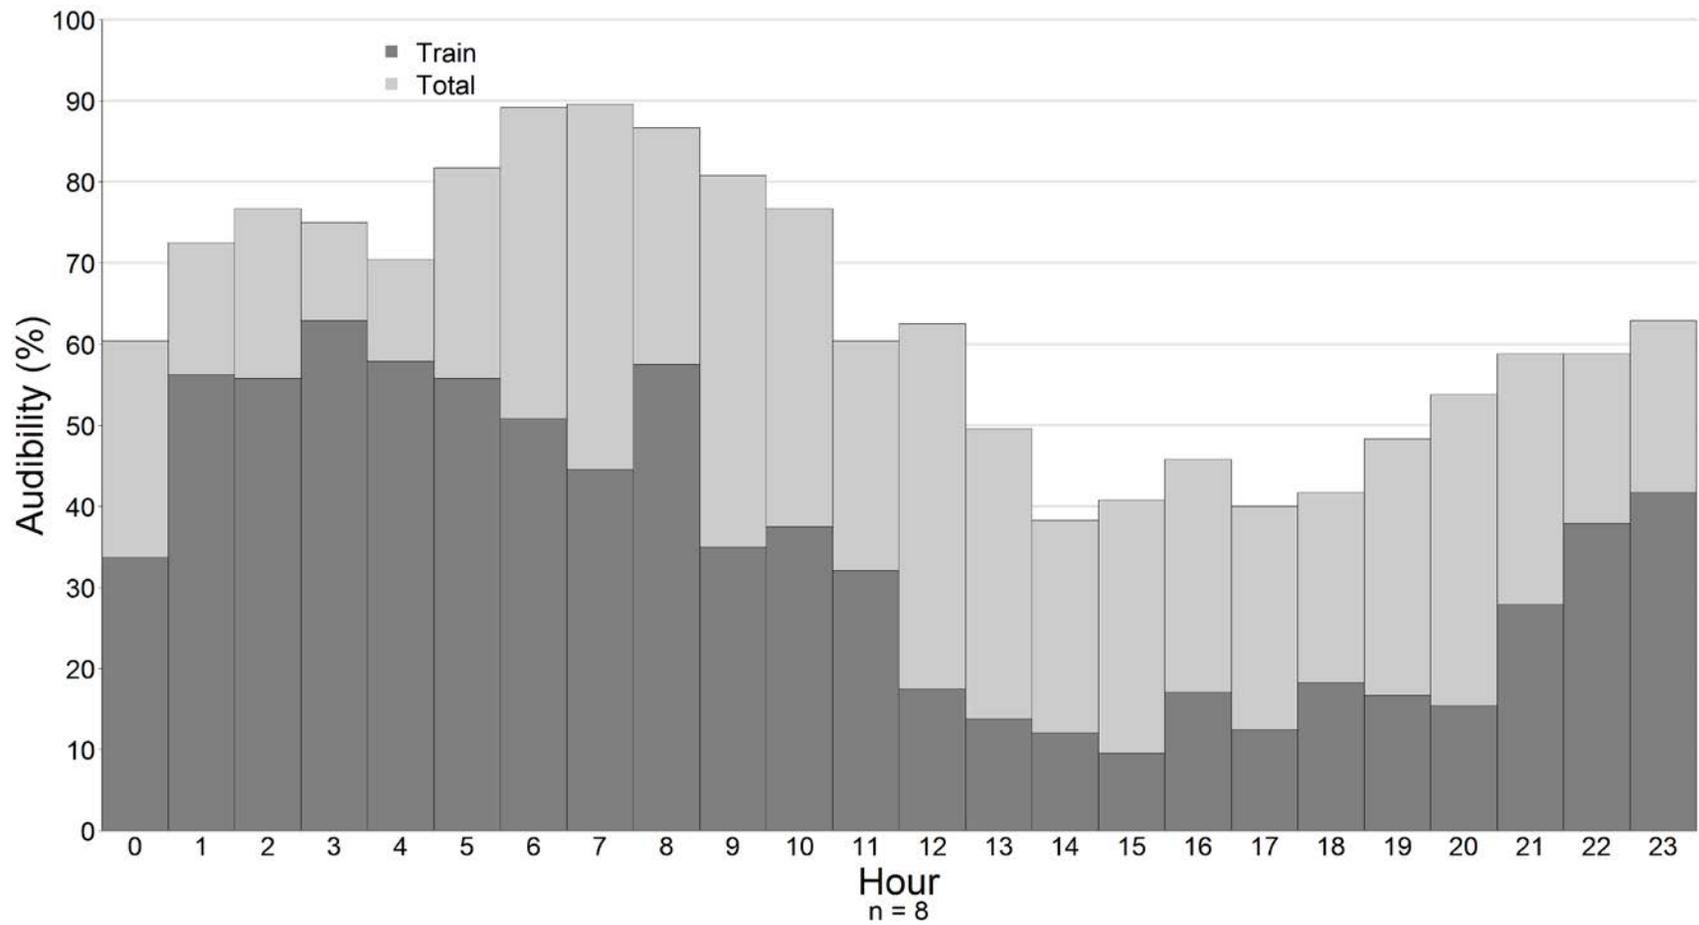


Figure 7. Comparison of hourly train and overall noise audibility at SCBL002. N=8 days off-site sound source analysis.

Discussion

The purpose of this study was to assess current conditions of the acoustical environment at SCBL. Monitoring results characterize existing sound levels and estimate natural ambient sound levels within the park, which are intended to provide the park with baseline information as well as to inform management decisions. Sound pressure level data, meteorological data, and continuous audio were collected from two sites for approximately 30 days each. The acoustical monitoring station locations were chosen to best assess noise impacts from vehicles, trains, and visitor center activity.

Results indicate that the natural ambient sound level (L_{nat}) at sites ranged between 26.3-31.9 dBA during the daytime and 26.8-30.6 dBA at night. Existing ambient sound levels (L_{50}) were slightly higher, ranging from 29.7-37.1 dBA during the day to 32.6-35.1 dBA at night. For comparison, a comprehensive 1982 study of noise levels in residential areas found that nearly 87% of US residents were exposed to day-night sound levels (L_{dn}) over 55 dB, and an additional 53% were exposed to L_{dn} over 60 dB (EPA 1982). Noise levels have increased nationally with population growth since the EPA study (Suter 1991; Barber et al. 2010). Therefore, the results imply that the natural ambient sound level during the monitoring period was considerably quieter than most residential areas.

Despite the relatively low overall sound levels, noise still exists at SCBL. The mean 24 hour percent time audibility of anthropogenic noise across all acoustic monitoring sites was 77.03% and a detailed analysis of audibility at the sites found that aircraft, vehicles, and trains contributed the most significant amounts of noise. From these results, it is unlikely that a visitor to SCBL can experience a significant time period completely free from anthropogenic noise, especially when near SCBL001 (mean 24 hour percent time audibility of noise = 90.7% vs. 63.4% at SCBL002). Furthermore, increasing sound levels may have wide ranging effects on wildlife such as reduced predatory success (Mason 2015) to increased vigilance by keystone species (Shannon et al. 2014).

Overall sound pressure levels at both sites were largely comprised of noise found in the frequencies typically attributed to transportation-based noise sources (20 – 1250Hz), indicating that human activity significantly affects the acoustical environment of the park. This effect was more pronounced at SCBL001 than it was at SCBL002, likely due to its proximity to the visitor center and the major road that bisects the park (Old Oregon Trail/Old Highway 92). For SCBL002, sound pressure levels increased during the nighttime hours, an affect that is attributed to the prevalence of nocturnally vocalizing insects.

Literature Cited

- Acoustical Society of America. 2014. Methods to Define and Measure the Residual Sound in Protected Natural and Quiet Residential Areas, Melville, NY. ANSI/ASA S3/SC1.100-2014.
- Barber J.R., C. Crooks, and K. Fristrup. 2010. The costs of chronic noise exposure for terrestrial organisms. *Trends in Ecology and Evolution* 25:180–189.
- Berglund, B., T. Lindvall, and D. H. Schwela (Eds.). 1999. HWO. Guidelines for community noise. World Health Organization, Geneva.
- Environmental Protection Agency. 1974. Information on Levels of Noise Requisite to Protect the Public Health and Welfare with an Adequate Margin of Safety.
- Environmental Protection Agency. 1982. National Ambient Noise Survey. Office of Noise Abatement and Control, Washington, DC.
- Shannon G, Angeloni LM, Wittemyer G, Fristrup KM, Crooks KR. 2014. Road traffic noise modifies behaviour of a keystone species. *Anim Behav.* 94:135–141.
- Haas, G.E., and T. J. Wakefield. 1998. National parks and the American public: A national public opinion survey on the national park system. Washington D.C. and Fort Collins, CO.: National Parks and Conservation Association and Colorado State University.
- Haralabidis Alexandros, S., et. al. 2008. Acute effects of night-time noise exposure on blood pressure in populations living near airports. *European Heart Journal Advance Access*. Published online February 12, 2008.
- Harris, C. M. 1998. Handbook of Acoustical Measurements and Noise Control, 3rd ed. McGraw-Hill, New York.
- Lynch, E., D. Joyce, and K. Fristrup. 2011. An assessment of noise audibility and sound levels in U.S. National Parks. *Landscape Ecology* 26: 1297-1309.
- Mason, J. T. 2015. The Impact of Anthropogenic Noise on Northern Saw-whet Owl (*Aegolius acadicus*) Hunting Behavior. Boise State University Theses and Dissertations. Paper 892. <http://scholarworks.boisestate.edu/td/892>
- McDonald, C. D., R. M. Baumgarten, and R. Iachan. 1995. Aircraft management studies: National Park Service Visitors Survey. HMMH Report No. 290940.12; NPOA Report No. 94-2, National Park Service, U.S. Department of the Interior.
- Mennitt, D., K. Sherrill, and K. Fristrup. 2014. A geospatial model of ambient sound pressure levels in the contiguous United States. *Journal of the Acoustical Society of America* 135:2746-2764.
- National Park Service. 2005. Acoustic and Soundscape Studies in National Parks: Draft. Fort Collins, CO: NPS Natural Sounds and Night Skies Division.

National Park Service. 2006a. Management Policy 4.9: Soundscape Management.

National Park Service. 2006b. Management Policy 8.2.3: Use of Motorized Equipment.

Suter, A. H. 1991. Noise and its Effects. Administrative Conference of the United States. Available at: <http://www.nonoise.org/library/suter/suter.htm> (accessed 17 January 2014).

Templeton, D. (Ed.). 1997. Acoustics in the built environment: advice for the design team. Architectural Press, Oxford

Appendix A: Site Photographs



Figure 8. SCBL001, 'Visitor Center' acoustical monitoring site.



Figure 9. SCBL002, 'Old Picnic Area' acoustical monitoring site.



Figure 10. SCBL002, 'Old Picnic Area' acoustical monitoring site.

Appendix B: Glossary of Acoustical Terms


Term	Definition
Acoustic Environment	A combination of all the physical sound resources within a given area. This includes natural sounds and cultural sounds, and non-natural human-caused sounds. The acoustic environment of a park can be divided into two main categories: intrinsic and extrinsic.
Acoustic Resources	Include both natural sounds like wind, water, & wildlife and cultural and historic sounds like tribal ceremonies, quiet reverence, and battle reenactments.
Amplitude	The relative strength of a sound wave, described in decibels (dB). Amplitude is related to what we commonly call loudness or volume.
Audibility	The ability of animals with normal hearing, including humans, to hear a given sound. It can vary depending upon the frequency content and amplitude of sound and by an individual animal's hearing ability.
Decibel (dB)	A unit of sound energy. Every 10 dB increase represents a tenfold increase in energy. Therefore, a 20 dB increase represents a hundredfold increase in energy. When sound levels are adjusted for human hearing they are expressed as dB(A).
Extrinsic Sound	Any sounds not forming an essential part of the park unit, or a sound originating from outside the park boundary. This could include voices, radio music, or jets flying thousands of feet above the park.
Frequency	Related to the pitch of a sound, it is defined as the number of times per second that the wave of sound repeats itself and is expressed in terms of hertz (Hz). Sound levels are often adjusted ("weighted") to match the hearing abilities of a given animal. In other words, different species of animals and humans are capable or hearing (or not hearing) at different frequencies. Humans with normal hearing can hear sounds between 20 Hz and 20,000 Hz, and as low as 0 dB at 1,000 Hz. Bats, on the other hand, can hear sounds between 20 Hz and 200,000 Hz.
Intrinsic Sound	Belongs to a park by the park's very nature, based on its purposes, values, and establishing legislation. Intrinsic sounds can include natural, cultural, and historic sounds that contribute to the acoustical environment of the park.
L_{50} , L_{90}	Metrics used to describe sound pressure levels (L), in decibels, exceeded 50 and 90 percent of the time, respectively. Put another way, half the time the measured levels of sound are greater than the L_{50} value, while 90 percent of the time the measured levels are higher than the L_{90} value.
L_{dn}	Day-Night Average Sound Level. Average equivalent sound level over a 24-hour period, with a 10-dB penalty added for sound levels between 10 p.m. and 7 a.m.
L_{eq}	Energy Equivalent Sound Level. The sound energy level averaged over the measurement period.
L_{nat} (Natural Ambient Sound Level)	The natural sound conditions in parks which exist in the absence of any human-produced noise.
Noise Free Interval (NFI)	The length of the continuous period of time during which no human-caused sounds are audible.

Term	Definition
Percent Time Above Natural Ambient	The amount of time that various sound sources are above the natural ambient sound pressure levels in a given area. It is most commonly used to measure the amount of time that human-caused sounds are above natural ambient levels. This measure is not specific to the hearing ability of a given animal, but a measure of when and how long human-caused sounds exceed natural ambient levels.
Percent Time Audible	The amount of time that various sound sources are audible to humans with normal hearing. A sound may be above natural ambient sound pressure levels, but still not audible. Similarly, some sounds that are below the natural ambient can be audible. Percent Time Audible is useful because of its simplicity. It is a measure that correlates well with visitor complaints of excessive noise and annoyance. Most noise sources are audible to humans at lower levels than virtually all wildlife species. Therefore percent time audible is a protective proxy for wildlife. These data can be collected by either a trained observer (on-site listening) or by making high-quality digital recordings for later playback (off-site listening).
Sound Exposure Level (SEL)	The total sound energy of the actual sound during a specific time period. SEL is usually expressed using a time period of one second.
Sound Pressure	Minute change in atmospheric pressure due to passage of sound that can be detected by microphones.
Sound vs.Noise	The NSNSD differentiates between the use of <i>sound</i> and <i>noise</i> , since these definitions have been used inconsistently in the literature. Although <i>noise</i> is sometimes incorrectly used as a synonym for sound, it is in fact sound that is undesired or extraneous to an environment. Humans perceive <i>sound</i> as an auditory sensation created by pressure variations that move through a medium such as water or air and are measured in terms of amplitude and frequency (Harris 1998; Templeton 1997).
Soundscape	The human perception of physical sound resources.

Appendix C: Modeled Impact Levels

NSNSD developed a model (Mennitt et al. 2014) that predicts the median sound level using measurements made in hundreds of national park sites as well as 109 explanatory variables such as location, climate, land cover, hydrology, wind speed, and proximity to noise sources such as roads, railroads, and airports.

The resulting model can predict sound levels anywhere in the contiguous U.S., and it can also estimate how much lower these sound levels would be in the absence of human activities. The modeled difference between the existing and predicted natural sound level (L_{50} impact) at SCBL is shown in Figure 11, and provides a measure of how much anthropogenic noise is increasing the existing sound level above the natural sound level, on an average summer day, in the park. At SCBL, the mean modeled sound level impact is 7.1 dBA, and this value represents a close approximation of expected impact levels at a randomly chosen point within the park. Each pixel in the graphic shown in Figure 11 represents 270m. For reference in translating sound level impacts into functional effects (for human visitors and resident wildlife), an increase in background sound level of 3 dB produces an approximate decrease in listening area of 50%. In other words, by raising the sound level in SCBL by just 3 dB, the ability of listeners to hear the sounds around them is effectively cut in half. Furthermore, an increase of 7 dB leads to an approximate decrease in listening area of 80%, and an increase of 10 dB decreases listening area by approximately 90%.

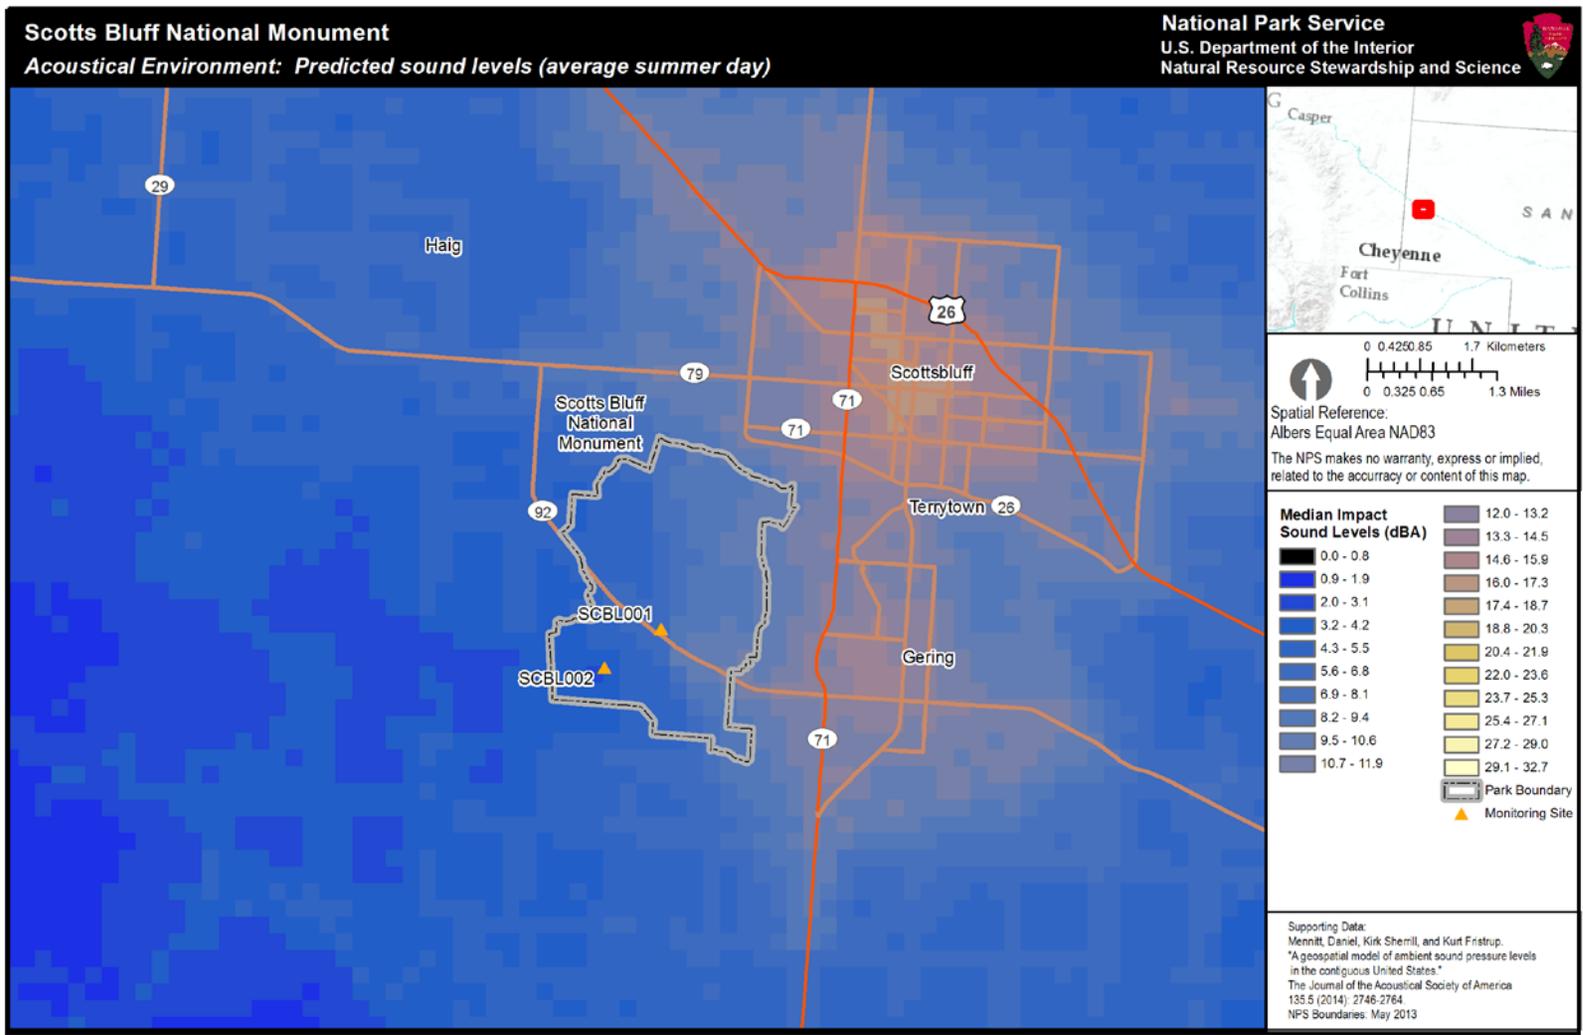

NPS Natural Sounds & Night Skies Division and NPS Inventory and Monitoring Program MAS Group 20160718

Figure 11. Modeled median sound level impacts in the area immediately surrounding SCBL and in the nearby region (inset). Map of predicted acoustic impact levels in the park for an average summer day. The color scale indicates how much man-made noise increases the sound level (in A-weighted decibels, or dBA), with 270 meter resolution. Black or dark blue colors indicate low impacts while yellow or white colors indicate greater impacts. Note that this graphic may not reflect recent localized changes such as new access roads or development. The mean acoustic impact level at the park is 7.1 dBA.

The Department of the Interior protects and manages the nation's natural resources and cultural heritage; provides scientific and other information about those resources; and honors its special responsibilities to American Indians, Alaska Natives, and affiliated Island Communities.

NPS 317/133778, August 2016

National Park Service
U.S. Department of the Interior



Natural Resource Stewardship and Science
1201 Oakridge Drive, Suite 150
Fort Collins, CO 80525

www.nature.nps.gov

2016
National Park Service.
CENTENNIAL
EXPERIENCE YOUR AMERICA™